



PUT MORE POWER TO WORK ON YOUR JOBSITE.



NEVER UNDERESTIMATE THE POWER OF PARTNERSHIP.

Running a successful business takes more than powerful equipment. It requires the strength of support services tailored to your business needs. From financing and leasing to parts and training, the Ingersoll-Rand global dealer network supports our products day after day. Whenever you see a piece of Ingersoll-Rand equipment, you'll know that all of Ingersoll-Rand is behind it.

Global Dealer Network
 Ingersoll-Rand has partnered with leading equipment dealers worldwide to bring you powerful equipment and quality service.

Financing
 Ingersoll-Rand Financial Services offers financing and leasing options tailored to fit your needs. Our industry knowledge and finance programs put powerful equipment into your hands with payment terms to fit your business.

Product Support Specialists
 Factory-located product support representatives provide expert product and application consultation on demand.

Aftermarket
 Ingersoll-Rand supplies the parts and service expertise you rely on for your aftermarket needs.

Remarketing
 The Ingersoll-Rand Remarketing team supports the marketplace when you're looking for used equipment. Check out information on Ingersoll-Rand used equipment at www.irsusedequipment.com.



YOU BRING THE PROJECT... WE'LL BRING THE SOLUTIONS.

IT'S TRUE. WE HAVE EVERY ASPECT OF YOUR UTILITY EQUIPMENT NEEDS COVERED — INCLUDING BACKHOE LOADERS, WHEEL LOADERS, EXCAVATORS, MATERIAL HANDLERS, AIR TOOLS, COMPRESSORS, GENERATORS, LIGHT TOWERS, COMPACTORS, AND A FULL LINE OF CONCRETE EQUIPMENT. IT'S ALL READY AND WAITING FOR YOU AT YOUR LOCAL INGERSOLL-RAND DEALERSHIP.

WE GO FURTHER THAN SIMPLY RENTING AND SELLING EQUIPMENT — YOU CAN COME TO US FOR PARTS, SERVICE, AND FINANCING SOLUTIONS. WE ARE YOUR PARTNER, A PARTNER THAT MAKES SURE THE JOB GETS DONE NO MATTER WHAT IT TAKES.



Leave nothing on your jobsite to chance. Call or visit your local Ingersoll-Rand Utility Equipment dealer today!

THE POWER OF INGERSOLL-RAND UTILITY EQUIPMENT

EARTHMOVING

WHEEL LOADERS



Model	Horsepower	Bucket Capacity
WL-350	60 hp (45 kW)	1.2 cu yd (0.9 m³)
WL-440	73.5 hp (55 kW)	1.4 cu yd (1.1 m³)

EXCAVATORS



Model	Horsepower	Max Digging Depth
ZX-75	72 hp (54 kW)	13' 11" (4.24 m)
ZX-125	94 hp (70 kW)	15' 4" (4.67 m)

BACKHOE LOADERS



Model	Horsepower	Max Digging Depth
BL-275	31.5 hp (23 kW)	10' 6" (3.2 m)
BL-370	46 hp (34 kW)	11' (3.35 m)
BL-570	56 hp (42 kW)	12' (3.66 m)

MATERIAL HANDLING



Model	Max Lift Height	Lift Capacity*
VR-518	18' 2" (5.5 m)	5,000 lb (2272 kg)
VR-530C	30' 4" (9.3 m)	5,300 lb (2409 kg)
VR-638	38' 8" (11.8 m)	6,700 lb (3039 kg)
VR-723	23' 4" (7.13 m)	7,000 lb (3182 kg)

*Full height.

STRAIGHT MAST



Model	Lift Height	Lift Capacity
RT-706J*	180" (4572 mm)	6,000 lb (2722 kg) @ 15' (4.57 m)
	264" (6706 mm)	3,300 lb (1497 kg) @ 22' (6.71 m)
RT-708J*	180" (4572 mm)	8,000 lb (3636 kg) @ 15' (4.57 m)
	264" (6706 mm)	4,400 lb (1996 kg) @ 22' (6.71 m)

*Available in 2-WD and 4-WD.

CONSTRUCTION TOOLS



AIR TOOLS*

- Pavement Breakers
- Jackhammers & Rockdrills
- Rivet Busters
- Diggers
- Needle Scalers
- Circular Saws
- Heavy-duty Impact Wrenches
- Electronic Pavement Breakers
- Chipping Hammers
- Backfill Tamperers & Sand Rammers
- Spike Drivers & Tie Tamperers
- Reciprocating Saw
- Pullers

*For more information, visit us at www.irtools.com.

COMPACTION

SINGLE DRUM VIBRATORY



Model	Operating Weight	Drum Width
SD-25D	5,642 lb (2559 kg)	42.0" (107 cm)
SD-25F	5,920 lb (2685 kg)	42.0" (107 cm)
SD-45D	10,600 lb (4807 kg)	54.0" (137 cm)
SD-45F	11,350 lb (5147 kg)	54.0" (137 cm)
SD-70D	15,750 lb (7143 kg)	66.0" (168 cm)

DOUBLE DRUM VIBRATORY



Model	Operating Weight	Drum Width
DD-10ST*	2,500 lb (1134 kg)	30 / 38" (76.2 / 96.5 cm)***
DD-10S**	3,000 lb (1360 kg)	30 / 38" (76.2 / 96.5 cm)***
DD-12S**	2,950 lb (1338 kg)	35.4" (90.0 cm)
DD-14S**	3,350 lb (1520 kg)	35.4" (90.0 cm)
DD-16	3,570 lb (1620 kg)	39.4" (100.0 cm)
DD-24	6,335 lb (2873 kg)	49.2" (125.0 cm)
DD-30	6,900 lb (3130 kg)	54.1" (137.0 cm)

*Static model, no vibration.
**Single drum vibration.
***Drum width shown front / rear.

LIGHT COMPACTION

SINGLE DRUM WALK-BEHIND



Model	Operating Weight	Drum Width
SX-170H	595 lb (270 kg)	22.0" (560 mm)

DOUBLE DRUM WALK-BEHIND



Model	Operating Weight	Drum Width
DX-500E	1,300 lb (590 kg)	22.6" (575 mm)
DX-600E	1,410 lb (640 kg)	25.0" (635 mm)
DX-700E	1,635 lb (742 kg)	25.5" (650 mm)

REVERSIBLE VIBRATORY PLATES



Model	Operating Weight	Plate Size (w x l)
BXR-60	132 lb (60 kg)	14" x 19" (350 mm x 470 mm)
BXR-70	155 lb (70 kg)	14" x 19" (350 mm x 470 mm)
BXR-100H	330 lb (150 kg)	15" x 25" (390 mm x 630 mm)
BXR-200E	530 lb (240 kg)	18" x 29" (450 mm x 740 mm)
BXR-300E	716 lb (325 kg)	18" x 34" (450 mm x 860 mm)

SINGLE-DIRECTIONAL VIBRATORY PLATES



Model	Operating Weight	Plate Size (w x l)
BX-6WH*	150 lb (70 kg)	16" x 21" (400 mm x 525 mm)
BX-60WH*	150 lb (70 kg)	17" x 22" (430 mm x 565 mm)
BX-8WH*	195 lb (90 kg)	19" x 23" (480 mm x 585 mm)
BX-80WH*	195 lb (90 kg)	20" x 22" (500 mm x 565 mm)
BX-120WH*	220 lb (100 kg)	22" x 22" (550 mm x 570 mm)
VP-8RH**	293 lb (133 kg)	20" x 19" (500 mm x 480 mm)

*Standard water tank and Honda engine.
**Four removable rollers for use on bricks and sub-base materials. Roller size (diameter x length) is 3.4" x 19" (86 mm x 480 mm).

UPRIGHT RAMMERS



Model	Operating Weight	Shoe Width (w x l)
RX-264H	127 lb (58 kg)	9" x 13" (230 mm x 330 mm)
RX-304H	156 lb (71 kg)	11" x 13" (270 mm x 330 mm)
RX-344H	157 lb (72 kg)	11" x 13" (270 mm x 330 mm)

TRENCH COMPACTOR



Model	Operating Weight	Drum Width*
TC-13	2,940 lb (1333 kg)	33.5" (850 mm)

*Optional 24" (610 mm) drums are available.

GENERATORS

MOBILE



Model	Prime Output	Motor Starting Capacity
G11	10 kW / 10 kVA	21 skVA @ 35% voltage dip
G20	14 kW / 18 kVA	64 skVA @ 35% voltage dip
G25	21 kW / 26 kVA	65 skVA @ 35% voltage dip
G40	30 kW / 38 kVA	94 skVA @ 35% voltage dip
G50	39 kW / 49 kVA	150 skVA @ 35% voltage dip
G75	59 kW / 74 kVA	215 skVA @ 35% voltage dip

PORTABLE



Model	Prime Output	Runtime
G2H	2.6 kW	1.6 hours
G3H	2.9 kW	9.8 hours
G5H	5.0 kW	16.0 hours
G7HE	7.25 kW	12.0 hours

COMPRESSORS


COMPRESSORS



Model	Free-air Delivery	Rated Operating Pressure
P65WK	65 cfm (1.9 m³/min)	100 psig (6.9 bar)
P90WIR	90 cfm (2.6 m³/min)	100 psig (6.9 bar)
P110WIR	110 cfm (3.1 m³/min)	100 psig (6.9 bar)
P135WIR	135 cfm (3.8 m³/min)	100 psig (6.9 bar)
AirSource	160 cfm (4.5 m³/min)	100 psig (6.9 bar)
AirSource Plus IR	185 cfm (5.2 m³/min)	100 psig (6.9 bar)
AirSource Plus JD	185 cfm (5.2 m³/min)	100 psig (6.9 bar)
XP185WIR	185 cfm (5.2 m³/min)	125 psig (8.6 bar)
XP185WJD	185 cfm (5.2 m³/min)	125 psig (8.6 bar)
P250WJD	250 cfm (7.1 m³/min)	100 psig (6.9 bar)
P260WIR	260 cfm (7.4 m³/min)	100 psig (6.9 bar)
VHP300WIR	300 cfm (8.5 m³/min)	200 psig (13.8 bar)
XP375WIR	375 cfm (10.6 m³/min)	125 psig (8.6 bar)
HP375WIR	375 cfm (10.6 m³/min)	150 psig (10.3 bar)
P425WIR	425 cfm (12 m³/min)	100 psig (6.9 bar)

LIGHTING

BALLOON LIGHT

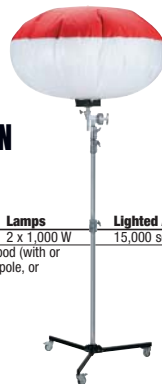

Model	Lamps	Lighted Area
BL2000*	2 x 1,000 W	15,000 sq ft (1400 m²)

*Available with tripod (with or without castors), pole, or hitch mount.

LIGHT TOWERS



Model	Generator Output	Runtime
LightSource	6 kW	62 hours
L6	6 kW	62 hours
L8	8 kW	62 hours

CONCRETE

CONCRETE MIXERS



Model	Operating Weight	Bag / Drum Capacity
CM6P	450 lb (204 kg)	0.5 - 1.0 / 6.0 cu ft (0.17 m³)
CM6	540 lb (245 kg)	0.5 - 1.0 / 6.0 cu ft (0.17 m³)
CM9	860 lb (390 kg)	1.0 - 1.5 / 9.0 cu ft (0.25 m³)

MORTAR MIXERS



Model	Operating Weight	Bag / Drum Capacity
MM6	560 lb (254 kg)	2.0 - 2.5 / 6.0 cu ft (0.17 m³)
MM6P	560 lb (254 kg)	2.0 - 2.5 / 6.0 cu ft (0.17 m³)
MM8	610 lb (277 kg)	2.5 - 3.0 / 8.0 cu ft (0.23 m³)
MM8P	610 lb (277 kg)	2.5 - 3.0 / 8.0 cu ft (0.23 m³)
MM10	650 lb (295 kg)	3.0 - 3.5 / 10.0 cu ft (0.28 m³)
MM12	1,055 lb (479 kg)	3.5 - 4.0 / 12.0 cu ft (0.34 m³)
MM12H	1,115 lb (506 kg)	3.5 - 4.0 / 12.0 cu ft (0.34 m³)
MM16H	1,355 lb (615 kg)	4.0 - 4.5 / 16.0 cu ft (0.45 m³)

POWER BUGGY



Model	Operating Weight	Max Payload
PB16*	1,250 lb (567 kg)	2,500 lb (1134 kg)

*Available with poly or steel bucket.

WALK-BEHIND SAWS



Model	Operating Weight	Max Blade Diameter
WS14C	155 lb (70 kg)	14" (356 mm)
WS14	190 lb (86 kg)	14" (356 mm)
WS16C	175 lb (79 kg)	16" (406 mm)
WS18	245 lb (111 kg)	18" (457 mm)
WS20	458 lb (208 kg)	20" (508 mm)
WS26	1,035 lb (469 kg)	26" (660 mm)
WS26D	1,225 lb (556 kg)	26" (660 mm)
WS36	1,350 lb (612 kg)	36" (914 mm)
WS36D	1,588 lb (720 kg)	36" (914 mm)

RAPID SCREED



Model	Operating Weight	Screed Board Widths
RS15	42 lb (19.1 kg)	6' / 12' / 20'

WALK-BEHIND TROWELS



Model	Operating Weight	Trowel Diameter
WT24	140 lb (64 kg)	24" (610 mm)
WT30	155 lb (71 kg)	30" (762 mm)
WT36*	170 lb (77 kg)	36" (914 mm)
WT46	225 lb (102 kg)	46" (1168 mm)

*WT36 available with 5.5 or 9.0 hp engine.

CONCRETE VIBRATORS



Model	Weight	Horsepower
PL15E*	17 lb (7.7 kg)	1.8 hp (1.3 kW)
PL20E*	19 lb (8.6 kg)	2.4 hp (1.8 kW)
PL30E*	25 lb (11.3 kg)	3.2 hp (2.4 kW)
PL25BP	19 lb (8.6 kg)	2.2 hp (1.6 kW)

*Available in either standard or quick disconnect direct from the factory. Full line of heads and shafts available.